

# miniature plug-in relay - Harmony RXM2L - 2 C/O - 230 V AC - 5 A - with LED

RXM2LB2P7

#### Main

Range of product	Harmony Electromechanical Relays	
Series name	Miniature	
Product or component type	Plug-in relay	
Device short name	RXM	
Contacts type and composition	2 C/O	
[Ithe] conventional enclosed thermal current	5 A at -4055 °C	

## Complementary

•		
Rated operational voltage limits	184253 V AC	
[Ui] rated insulation voltage	250 V conforming to IEC	
Maximum switching voltage	250 V AC 28 V DC	
Drop-out voltage threshold	>= 0.15 Uc AC	
Load current	5 A at 250 V AC 5 A at 28 V DC	
Maximum switching capacity	1250 VA AC 140 W DC	
Average resistance	16500 Ohm at 23 °C +/- 15 %	
Mechanical durability	10000000 cycles	
Electrical durability	100000 cycles for resistive load 50000 cycles, 1 A at 28 V, DC-13 NO	
Safety reliability data	B10d = 100000	
Operating rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load	
Utilisation coefficient	20 %	
Dielectric strength	2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection	
Protection category	RTI	
Pollution degree	3	
Operating position	Any position	
Test levels	Level A group mounting	
Sale per indivisible quantity	10	
Contacts material	Silver alloy (Ag/Ni)	

Net weight 0.031 kg

#### **Environment**

Standards	CE IEC 61810-1 (iss. 2)	
Ambient air temperature for storage	-4085 °C	
Vibration resistance	3 gn, amplitude = +/- 1 mm (f = 1050 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 1050 Hz)not operating conforming to IEC 60068-2-6	
Shock resistance	30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27	

# **Packing Units**

PCE
1
2.000 cm
3.000 cm
4.500 cm
32.000 g
BB1
10
3.000 cm
10.500 cm
12.000 cm
348.000 g
S02
240
15.000 cm
30.000 cm
40.000 cm
8.612 kg

## **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

⊘ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	20
Environmental Disclosure	Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
EU RoHS Directive  REACh Regulation	(Product out of EU RoHS legal

### **Use Again**

○ Repack and remanufacture	
Circularity Profile	End of Life Information

WEEE




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back


No

#### **Dimensions Drawings**

#### **Dimensions**

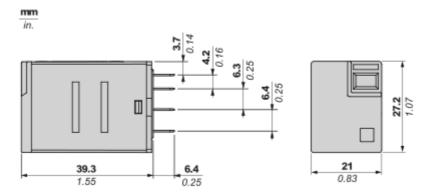

Pin Side View




#### RXM2LB2P7

Connections and Schema

#### Wiring Diagram






Symbols shown in blue correspond to Nema marking.

#### Performance Curves

#### **Electrical Durability of Contacts**

#### Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 2 Poles Relay



X: Contact current (A)

Y: Durability (Number of operating cycles)


A: Inductive load B: Resistive load

Note: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

#### **Maximum Switching Capacity**

#### For 2 Poles Relay



X : Contact voltage (v)
Y : Contact current (A)
A : Inductive AC load
B : Resistive AC load
C : Inductive DC load


D: Resistive DC load

Note: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

For low level loads (below 10mA), we recommend to use RXM\*GB series with bifurcated contacts relays instead.

AC Coil Voltage and Operating Temperature under continuous duty

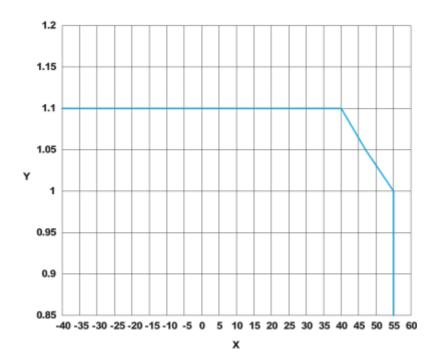


X : Operating temperature (°C)Y : AC coil voltage (UC)

#### RXM2LB2P7

#### **Technical Illustration**

#### **Dimensions**

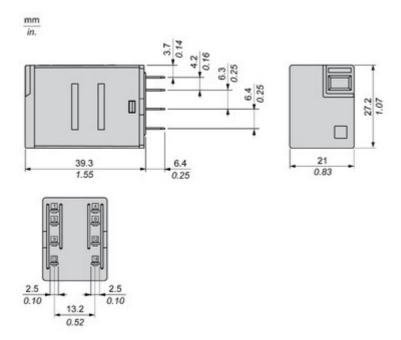

#### Offer Marketing Illustration

#### **Product benefits / Features**

# **Features**

#### Easy Harmony RXMLB Relay



Fit to customer needs coverage of most general control panel applications





Easy to select simple selection and wide availability



Convenient to use Easy status readiness trough mechanical indicator & LED



Safe to perform product reliability, compliance with industrial standard and eco-design Offer Marketing Illustration

#### **Product benefits / Features**

## **Technical Benefits**

Easy Harmony RXMLB Relay

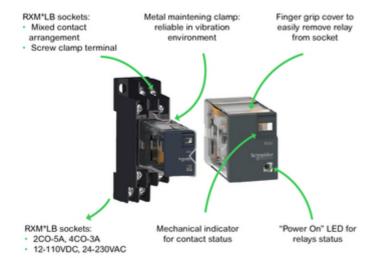



Image of product / Alternate images

#### **Alternative**








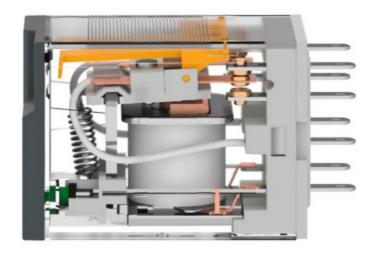



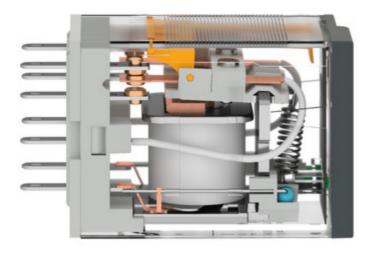

15

Image of product in real life situation



