



DIN 22.5mm

22.5mm Din Rail Timer TXU858


Features

- ON delay/Interval
- 12 time ranges
- Universal supply voltage
 - 20 to 240V AC 50/60 Hz
 - 18 to 240V DC
- LED indications: Power ON, Relay ON

Applications


- Power controls panel
- Compressor panel
- Packing machine
- Printing machine
- Testing equipment

Dimensions (All are in mm)

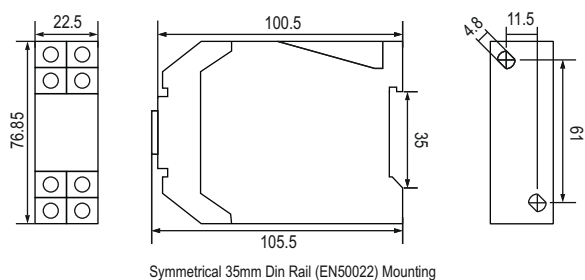


Timing diagram


Function : ON delay



Function : Interval



Terminal connection



Technical specifications

LED specifications

No. of LED	1
LED indication	Star relay ON, Delta relay ON

Input specifications

Accuracy setting	±5% of F.S.
Repeat	±0.5% or 50 msec (F.S. = Full scale)

Output specifications

Relay contact	2C/O SPDT
Contact rating	5A @250V AC or 24V DC resistive

Functional specifications

Modes	ON delay/Interval
Time ranges	0-1 sec/min/hr, 0-3 sec/min/hr, 0-10 sec/min / hr, 0-30 sec/min/hr
Resolution	0.1sec
Reset	ON power interruption, Reset time <100 msec

Auxiliary supply specifications

Supply voltage	20 to 240V AC (50/60Hz), 18 to 240V DC
Power consumption	2VA max

Environmental specification

Temperature	Operating: 00 to 50 °C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non - condensing)	95% RH

Mechanical specifications

Mounting	DIN rail
Weight	115 gm

Ordering information

Product code	Supply voltage
TXU858	20 to 240V AC, 18 to 240V DC