

IGBT MODULE (F series)


■ Features

- Low Saturation Voltage
- Voltage Drive
- Variety of Power Capacity Series

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial Machines, such as Welding Machines

■ Outline Drawings

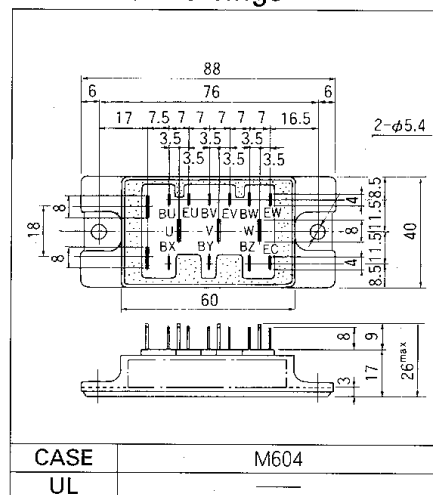

■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings

Items		Symbols	Ratings	Units
Collector-Emitter Voltage		V_{CES}	600	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	Continuous	I_C	30	A
	1ms	$I_{C \text{ pulse}}$	60	
	Continuous	$-I_C$	30	
	1ms	$-I_{C \text{ pulse}}$	60	
Max. Power Dissipation		P_C	120	W
Operating Temperature		T_j	+150	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +125	$^{\circ}\text{C}$
Net. Weight			235	g
Isolation Voltage	AC. 1min.	V_{isol}	2500	V
Screw Torque		Mounting *1	3.5 [35]	N · m
		Terminals	—	{kg · cm}

*1 Recommendable Value 2.5 to 3.5 N•m [25 to 35 kg•cm] (M5)


● Electrical Characteristics (Tc=25°C)


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =600V T _J =25°C			1.0	mA
		V _{GE} =0V V _{CE} =600V T _J =125°C			—	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =±20V			100	nA
Gate-Emitter Threshold Voltage	V _{GE (th)}	V _{CE} =20V I _C =20mA	3.0		6.0	V
Collector-Emitter Saturation Voltage	V _{CE (sat)}	V _{GE} =15V I _C =20A			2.5	V
Input Capacitance	C _{ies}	V _{GE} =0V		1900		pF
Output Capacitance	C _{oes}	V _{CE} =10V		—		
Reverse Transfer Capacitance	C _{res}	f=1MHz		—		
Turn-on Time	t _{on}	V _{CC} =300V			0.8	μs
	t _r	I _C =20A			0.6	
Turn-off Time	t _{off}	V _{GE} =±15V			1.5	
	t _f	R _G =120Ω			1.0	
Diode Forward On-Voltage	V _F	I _F =20A, V _{GE} =0V			2.5	V
Reverse Recovery Time	t _{rr}	I _F =20A, -di/dt=100A/μs V _{GE} =-10V			300	ns

● Thermal Characteristics


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	Rth (j-c)	IGBT			1.56	°C/W
	Rth (j-c)	Diode			3.01	
	Rth (c-f)	With Thermal compound		0.06		

■ Equivalent Circuit Schematic

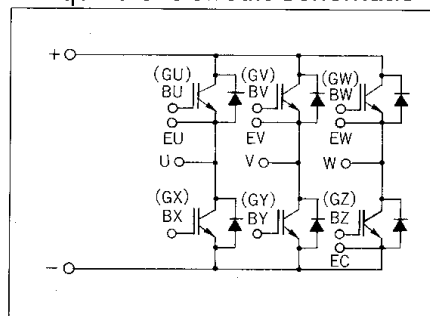


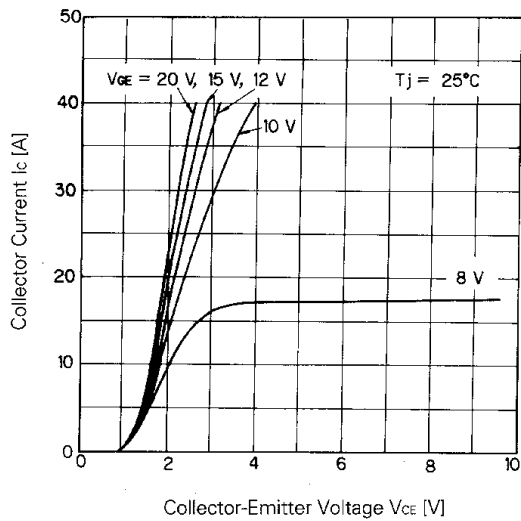


Collector Current vs. Collector-Emitter Voltage

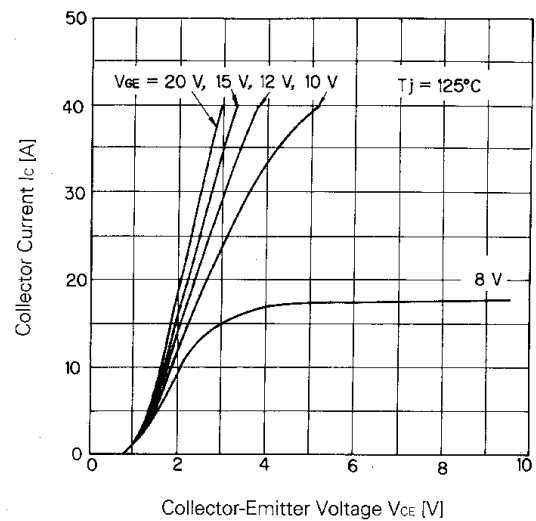


Collector Current vs. Collector-Emitter Voltage

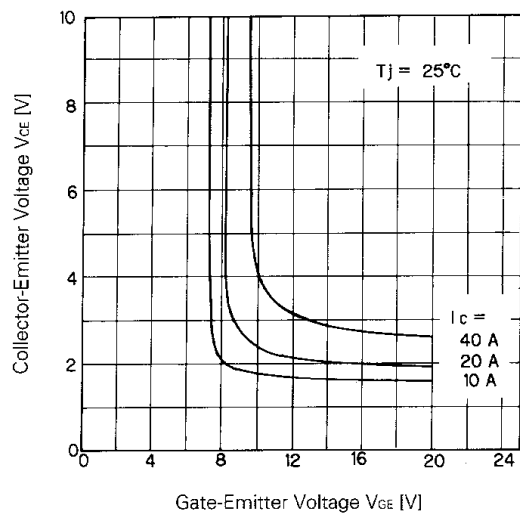


Collector-Emitter Voltage vs. Gate-Emitter Voltage

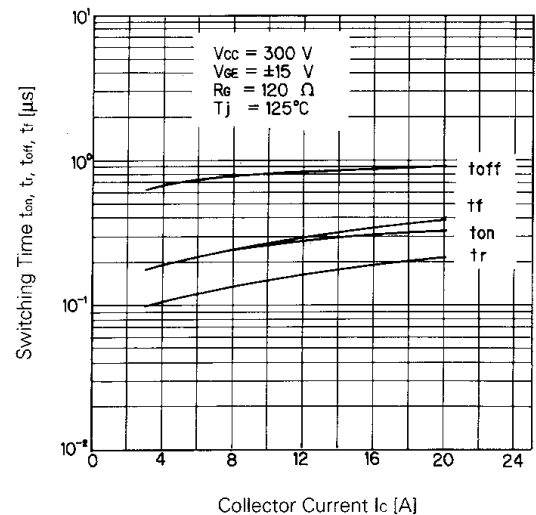







Switching Time

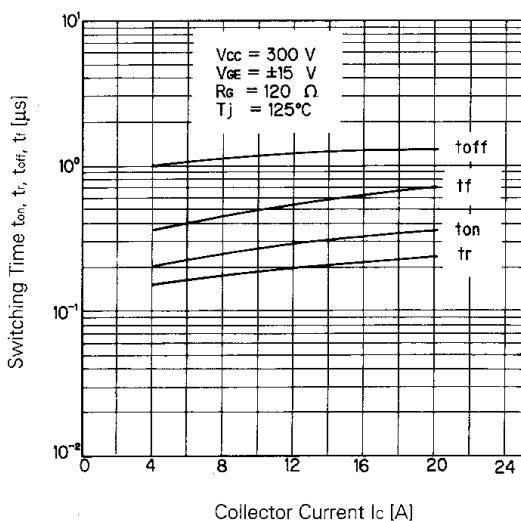

Switching Time

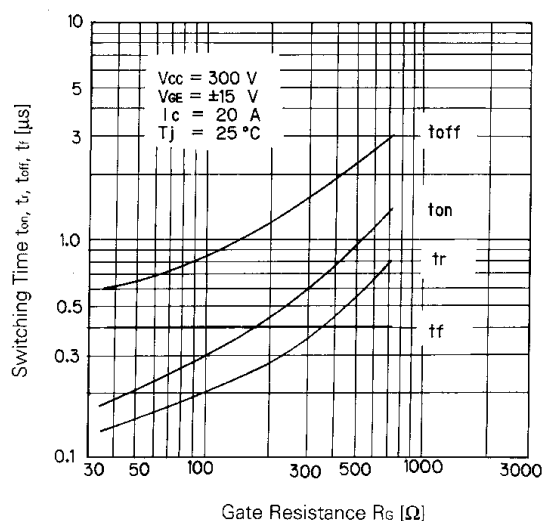

Switching Time-Gate Resistance

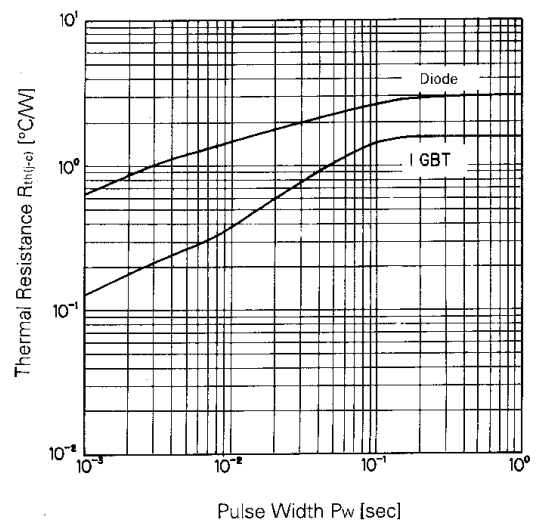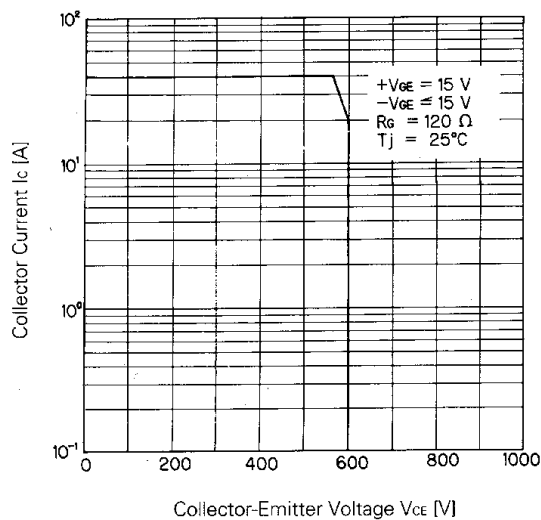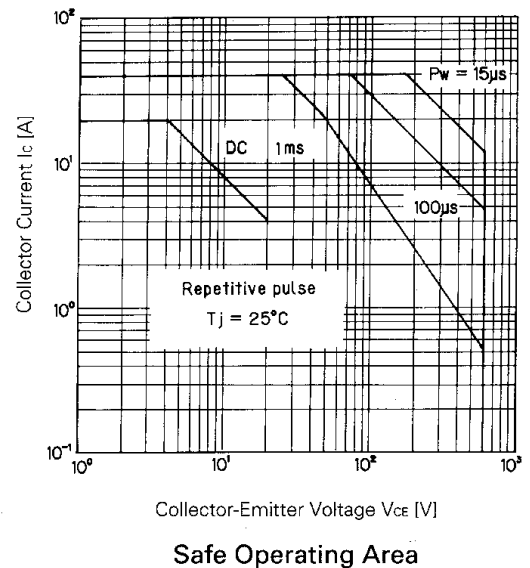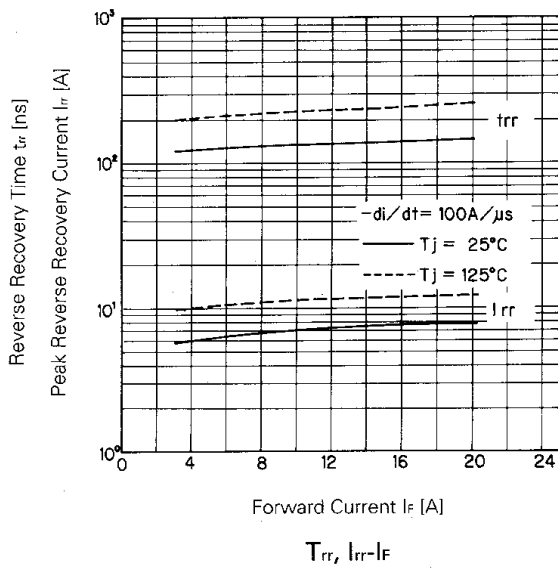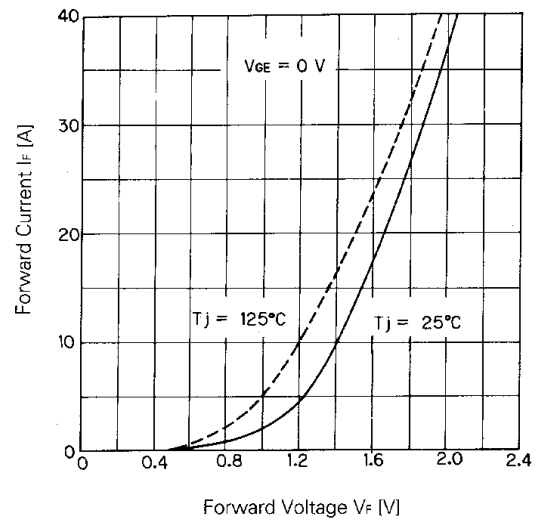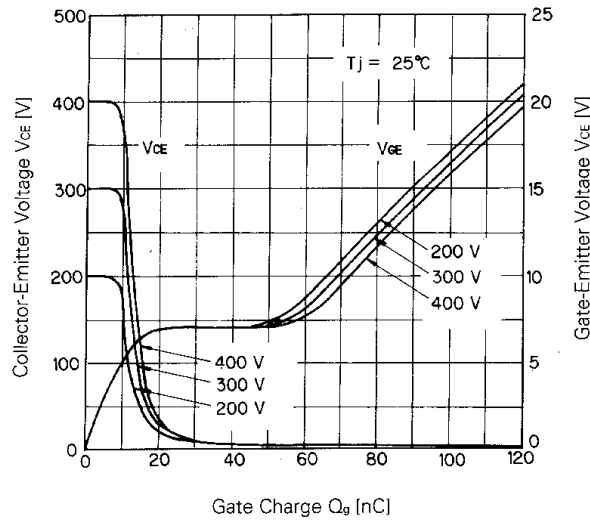

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>