

Product datasheet

Specifications



Socket, mixed contact, relay type
RXM2 RXM4, screw clamp
terminals, 250 V AC

RXZE2M114

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact Plug-in relay REXL with 2 C/O contact Plug-in relay REXL with 4 C/O contact Plug-in relay 782H with 4 C/O contact
Device short name	RXZ
[Ith] conventional free air thermal current	10 A
Product or component type	Socket
Contacts type and composition	4 C/O

Complementary

[Ue] rated operational voltage	< 250 V conforming to IEC < 300 V conforming to UL
Connections - terminals	Screw clamp terminals, 1 x 0.34...1 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.34...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Shape of pin	Flat
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Wire stripping length	8 mm
Contact terminal arrangement	Mixed
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	30 mm
Net weight	0.051 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
-------------------------	------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Dielectric strength	2500 V
Standards	IEC 61984
Product certifications	UL CSA Lloyd's
Marking	CE
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.600 cm
Package 1 Width	3.100 cm
Package 1 Length	7.000 cm
Package 1 Weight	52.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	7.600 cm
Package 2 Width	8.900 cm
Package 2 Length	15.500 cm
Package 2 Weight	552.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	11.572 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.


[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Total lifecycle Carbon footprint	1
Use Better	
Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
Use Again	
Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No

Dimensions Drawings


Dimensions

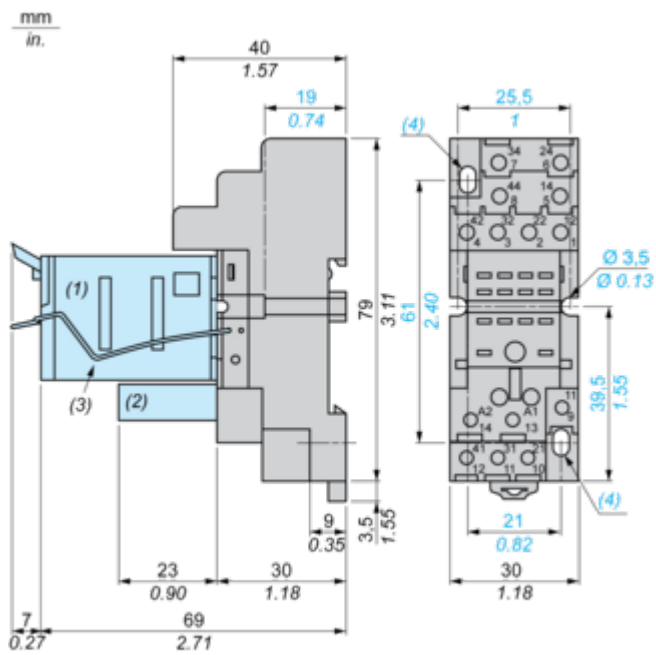

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes Ø 3.5 mm x 6.5 mm / Ø 0.13 in. x 0.25 in.


Connections and Schema

Wiring Diagram

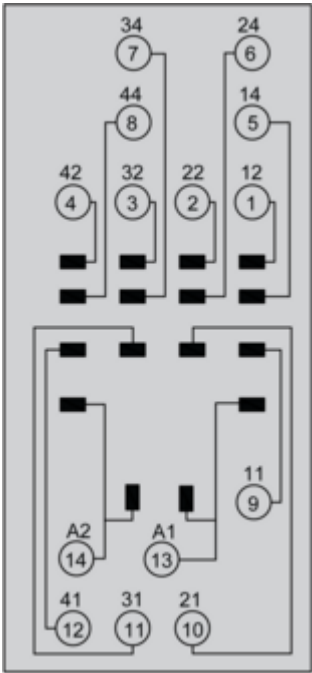

Technical Illustration

Dimensions

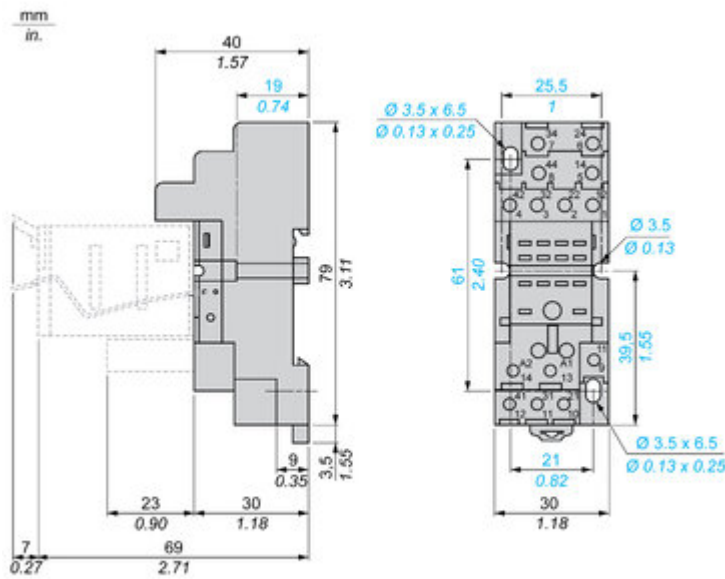


Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Timer Relay

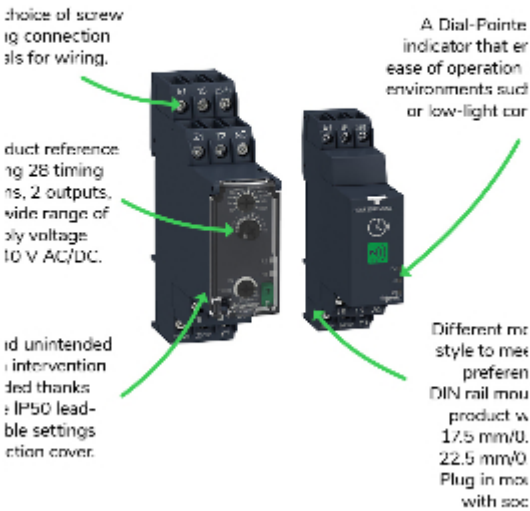

Offer Marketing Illustration

Product benefits / Features

Features

Harmony Timer Relay



"Diagnostic button" to check downstream circuit immediately, shorten the commission and troubleshooting time



Compatible with a wide range of applications including machines, buildings, water segments, and HVAC.



Wide range of time delay for adjustment: from 0.01 s to 999 hrs.



Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.



Unprecedented accuracy, predictive maintenance, and superior security.



Image of product / Alternate images

Alternative

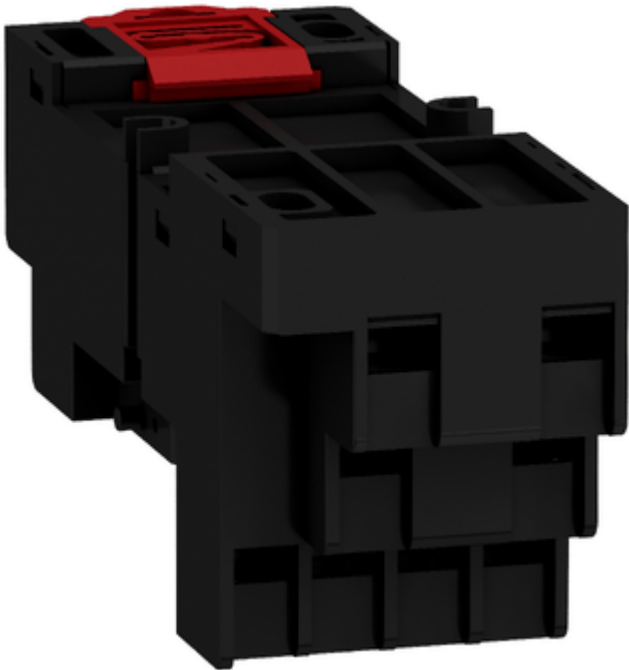






Image of product in real life situation

