


Approvals:

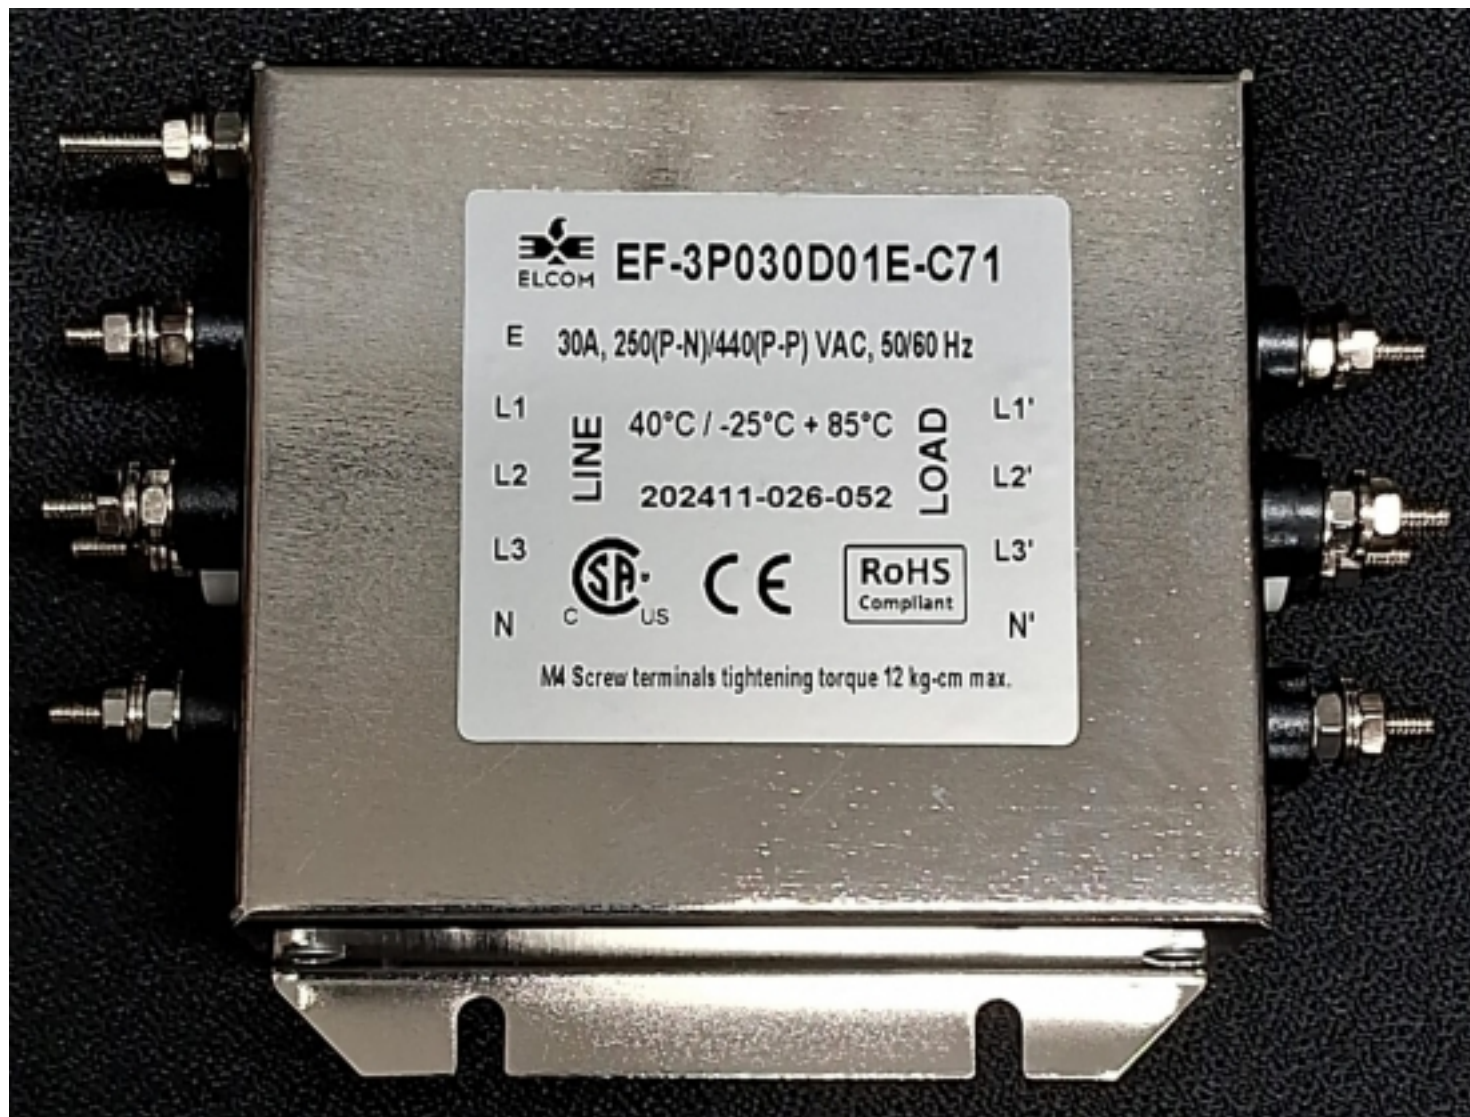

EMI/RFI Filter, Chassis Mount, 3 $\tilde{A}$, 30A, 250(P-N),
440(P-P) VAC, 50/60Hz, CE, CSA & RoHS.

Specifications

Mounting :	Chasis-type
High Voltage test for 60 sec.:	1.5 KVAC between P & N shorted together & Earth
Voltage Drop:	1 Volt . max.
Insulation Resistance at 500 VDC:	300 M ohms min. between P & N shorted together & Earth
Rated Voltage:	440(P-P), 250 (P-N) VAC, 50Hz, 3 Phase
Rated Current:	30 Amp
Output Connection:	Screw Lead Through M-4
Operating Temperature Range:	0 to 85 Deg. C.

Contd..



Specifications - Contd..

Input Connection:	Screw Lead Through M-4
Leakage Current:	3 x 0.3 mA
Application:	General Electronic Devices / Telecom